
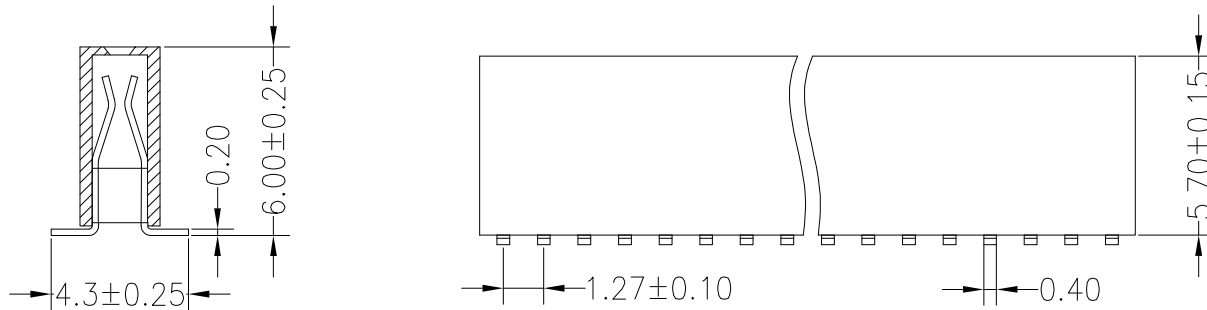


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

RoHS **HSF**


SPECIFICATIONS:

- No. of Positions: 24
- Rated current: 1.0AMP
- Contact resistance: 20mΩ Max
- Withstand voltage: 500V AC/DC
- Insulation resistance: 1000MΩ Min
- Operation Temperature: -40 ℃ to +105 ℃
- Contact Material: Brass
- Contact Plating: 1u" Au Over Ni.
- Insulator Material: Polyester(UL94V-0) Black
- Standard: PA6T
- Max.Processing Temp: 230 ℃ for 30-60 seconds
(260 ℃ for 10 seconds)

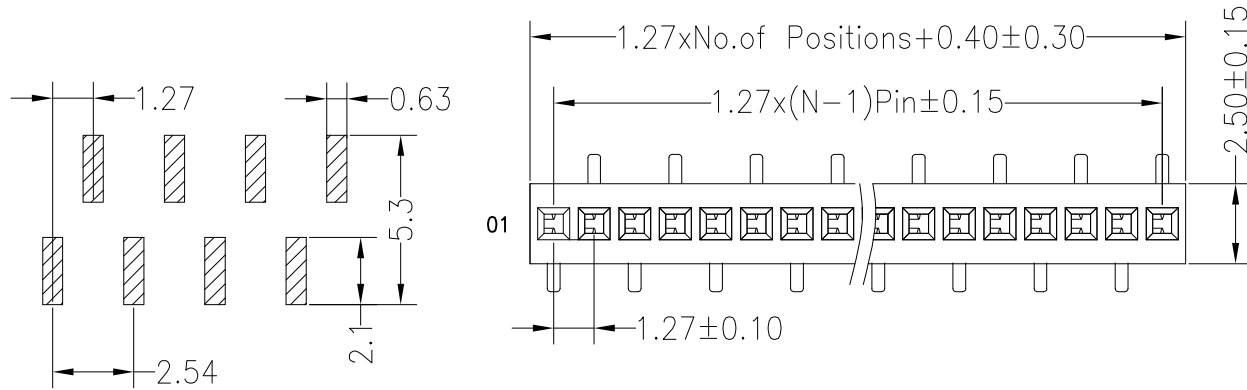

Ordering Information

ESS-COIA-M0-SOSMT

				OPERATION		SCALE	FIT	DRAW	DATE	 Embedded Systems Academy GmbH Website: esacademy.com Email: sales@esacademy.de Tel.: +49 5105 5827897 Fax: +49 5105 5827897	
				X.X	±0.30	UNIT	mm	CHECK	2018.12.04	Part No. ESS-COIA-M0-SOSMT	
				X.XX	±0.20	SIZE	A4			Tile 1.27mm female header H5.7 1*24P SMT	
A0	2018.12.04	NEW DRAWING		X.XXX	±0.10	SHEET	1/1	APPROVE		Customer No.	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	DIM	TOL	PROJ.				